



Husqvarna®



Husqvarna PG 280

PG 280 is a single disc floor grinder that you can quickly convert for edge grinding on both sides. It efficiently grinds adhesives, paint, epoxy and spackle. With a grinding width of 280 mm it is suitable for small to medium concrete areas. Designed to facilitate an ergonomic work position, it is easy and convenient to use. The machine is light and compact and therefore easy to transport and set-up.

Motor

Output power (As rated by the engine/motor manufacturer)	1.54 kW
Rated current	20 A
Voltage	100-120 V
Phases	1 ph
Pins	3-pin
Frequency	50 Hz

Other

Grinding width	280 mm
Grinding disc diameter	280 mm
Grinding disc speed min	0 rpm
Grinding disc speed max	940 rpm
Grinding pressure, max	27 kg
Number of grinding discs	1

Dimensions

Product size length	1320 mm
Product size width	420 mm
Product size height	990 mm
Weight	72 kg

Articles for PG 280

FLOOR GRINDER PG 280 100-120 V | 1-ph | 50 Hz | UK | 2-pin

967 64 87-05


FLOOR GRINDER PG 280 220-240 V | 1-ph | 50 Hz | EU | 2-pin

967 64 87-01

Features for PG 280

Quick conversion to edge grinding

Easily removable lid covers and wheel setting enables quick conversion to edge grinding on both sides. No tools are required. Allows an upright work position.

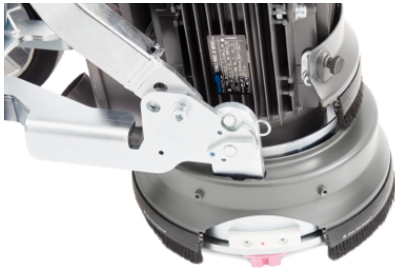

Easy removal

Offers efficient grinding of adhesive, paint, epoxy and spackle.



Easy to transport and set-up

The machine is light and fits easily in any car thanks to the compact design and foldable frame and dividable parts.




Easy to use

The speed is fixed and no settings are required. The machine also has an user-friendly logical control panel with overload protection.



Recommended tools for PG 280



G1410 3 PCS



G1420 3PCS



G1440 3PCS




G1470 3PCS




G1480 3PCS

Concrete hard	● ● ●	● ● ●	● ○ ○		
Concrete medium		● ○ ○	● ● ○	● ○ ○	
Concrete soft				● ● ●	● ● ○
Paint and thin epoxy	● ○ ○	● ● ○	● ● ●	● ○ ○	● ○ ○
Plastic-like ceramic glues		● ○ ○	● ● ●		


Porous ceramic glues				● ● ●	● ● ○
Rain-damaged concrete				● ● ○	● ● ●
Semi-polished concrete	● ● ●	● ○ ○			
Thick epoxy	● ○ ○	● ○ ○	● ● ●	● ○ ○	
Vinyl glues	● ○ ○	● ● ○	● ● ●	● ○ ○	● ○ ○



**VARI-GRIND G620
3PCS**




**VARI-GRIND G640
3PCS**



**VARI-GRIND G670
3PCS**



G11X1




SharX™


Concrete hard	● ● ●	● ○ ○			● ● ●
Concrete medium	● ○ ○	● ● ●	● ○ ○		
Concrete soft		● ● ○	● ● ●	● ○ ○	
Paint and thin epoxy	● ● ○	● ● ●	● ○ ○	● ● ●	
Plastic-like ceramic glues	● ○ ○	● ● ●	● ● ●	● ● ●	
Porous ceramic glues			● ● ●	● ● ●	
Rain-damaged concrete		● ○ ○	● ○ ○		
Semi-polished concrete	● ○ ○				● ● ●
Thick epoxy	● ○ ○	● ● ●	● ○ ○		
Vinyl glues	● ● ○	● ● ●	● ○ ○		



**P1200 series for PG
machines**



HiperFlex FP40



HiperFlex FP80



HiperFlex FT80

Concrete		● ● ●		● ● ●
Concrete hard	● ● ○	● ● ●		
Concrete medium	● ● ●	● ● ○		● ● ○
Concrete soft	● ● ○			● ● ●
Marble			● ● ●	
Paint and thin epoxy		● ● ○		
Plastic-like ceramic glues		● ● ○		
Terrazzo	● ○ ○		● ● ●	● ● ●
Vinyl glues		● ● ●		

